ROBERT GORDON
INTERIORS

MADE IN AUSTRALIA • MADE IN AUSTRALIA •

OYSTER WALL SCONCE LIGHT

Specification Sheet

The Oyster Wall Sconce by Robert Gordon brings sculptural elegance to considered interiors. Its shell-inspired ceramic form pairs a scalloped edge and gently fluted detailing with a frosted spherical light. Available in 12 bespoke glazes and finishes to complement a range of spaces. Proudly designed and made in Australia.

Available Glazes / Finishes:



225670 COAST



225691 STORM



225619 SALTBUSH



225625 STONE



225602 WHITE OCHRE



225608 POPPYSEED



225627 SHALE



225661 BONE



225606 RIVERGUM



2256OG OLIVE



225603 ROSE QUARTZ




225624S SAND

Disclaimer: Due to the natural characteristics of clay and our high-temperature firing process, variations in colour and shade are an inherent feature of our ceramics. Our reactive glazes create unique finishes, ensuring no two pieces are exactly alike. If you are seeking a particular shade, we recommend selecting your piece in person to appreciate its true colour and finish.

ROBERT GORDON

INTERIORS

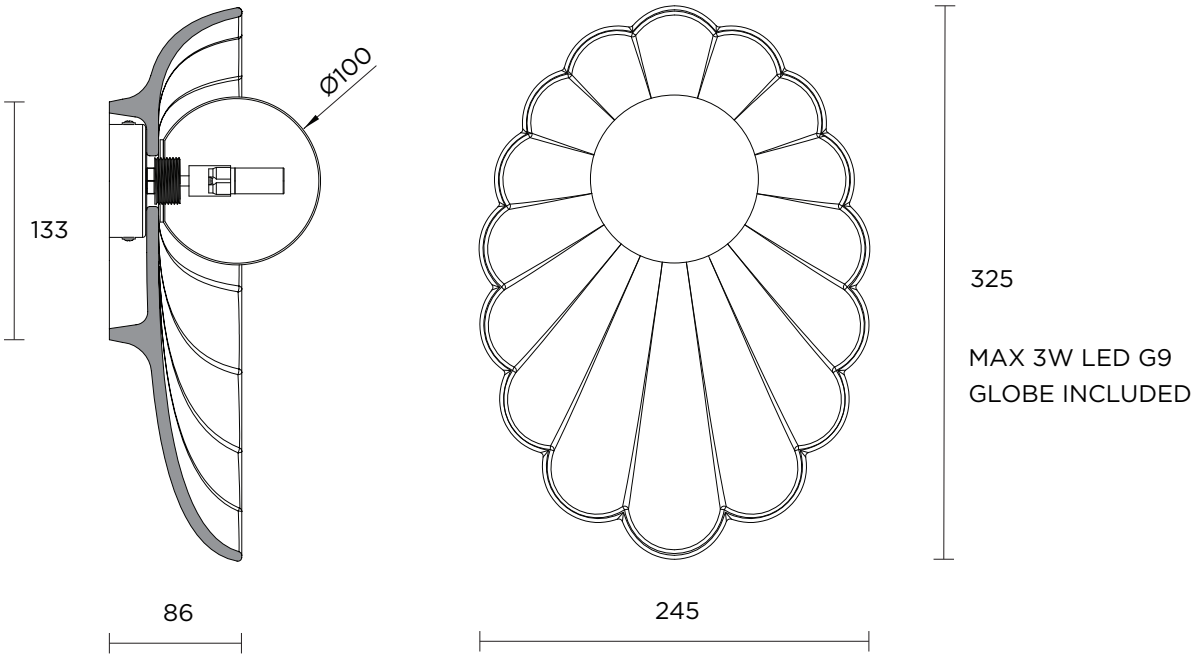

Measurements in mm. Not to scale.
Dimensions are nominal measurements only

SPECIFICATIONS

Product Code	2256
Title	Oyster Wall Sconce Light
IP Rating	IP44 - Splash resistant
Mounting	Wall Mounted
Dimensions	L:325mm W:245mm D:86mm (±5mm)
Voltage	220 - 240V AC 50hz
Weight	1.85kg
Globe	Max 3W LED G9 Globe - Non-dimmable *(Included)*
Colour Temp	3000K Warm White
Light Output	330 lm
Certification #	WTF21F04040508R2L
Warranty	12 Month from date of purchase
Cleaning	We recommend the use of a damp cloth to remove dust and fine debris. Always ensure light is off before cleaning. This product should not be cleaned with abrasive cleaners. Improper treatment may void product warranty.

Lead times: Please allow up to 6-8 weeks for production

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication, however the manufacturer/distributor takes no responsibility for printing errors.

Designed and made in Australia by Robert Gordon Pottery


For more information on this product, please contact us:
03 5941 3144
sales@robertgordonaustralia.com

ROBERT
GORDON

INTERIORS

Thank you for purchasing high quality Australian made product, proudly designed and crafted by Robert Gordon Pottery. All our ceramic lighting products are made from high fired stoneware and adhere to all Australian standards and requirements.

To ensure correct function and safety, please read and follow all instructions carefully before assembly. Keep this document handy for future reference.

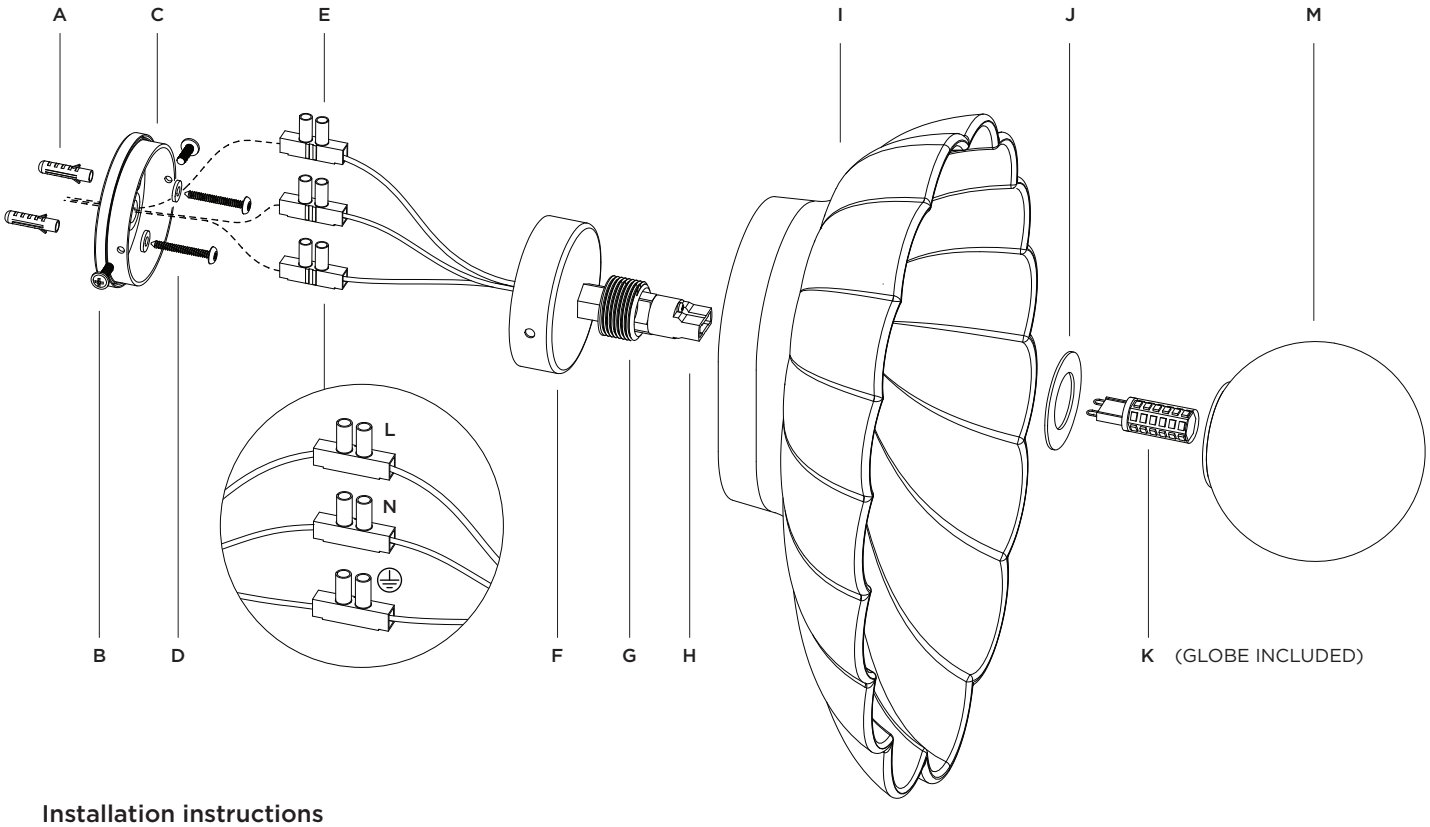

Installation instructions

1. Remove all packaging material from lighting product. Be careful not to discard any small parts such as screws that may be hidden within the boxing.
2. Use the mounting bracket **(C)** as a template to mark the screw positions on wall.
3. When happy with position, install the mounting bracket **(C)** onto wall by mounting screws **(D)**, using wall anchors **(A)** if required.
4. Make sure main supply is turned off. Connect the mains supply wire to the terminal block **(E)**. Ensure the wires are secure and that no bare wires are exposed.
5. Install the luminaire **(F)** onto the mounting bracket **(C)** using the fixing screws **(B)** provided.
6. Install the LED globe **(J)** into the lamp holder **(H)** with a tissue or clean gloves. Be sure not to touch with bare hands, as this could shorten the life of the globe.
7. Carefully position ceramic shade **(I)** over threaded ring **(G)** until the piece makes contact with wall.
8. Whilst holding ceramic shade **(I)** in place, install washer **(J)**, then glass ball **(M)** onto the threaded ring **(G)** by turning clockwise. Turn until all pieces are secure but do not over-tighten as this may cause either ceramic or glass pieces to break.

THIS ITEM MUST BE INSTALLED BY A LICENSED ELECTRICIAN. DO NOT EXCEED THE MAXIMUM WATTAGE RATING.

ROBERT GORDON

INTERIORS

Installation requirements

- Product must be installed by a qualified electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring regulations. for eg. AS/NZS 3000:2007/Amendment 2:2012 Electrical installations.
- Do not exceed the maximum wattage rating.
- Ensure a suitable location for installation. Do not install in front of air flow vents or systems and areas compromised by moisture of dampness. If installation area is prone to moisture an appropriate exhaust fan may be required. Damage caused by corrosion is not a product fault, and as such not covered under product warranty.
- Check entire product before installation for any sign of damage. Do not install product if there appears to be signs of damage in any way.
- Ensure before any work is undertaken that the power is switched OFF at mains.
- Refer to the IP rating provided to install the product in a appropriate location.

Safety tips / Maintenance

- Always ensure the power is OFF and the light fitting has cooled down before carrying out any maintenance or cleaning on globe or pendant.
- To avoid damage to fitting, ensure the power lead and screws are secure before connecting the power.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean Oyster sconce, wipe with a damp cloth making sure power is OFF.

Warranty

- This product is covered by a 12 month warranty, from date of purchase..
  Warranty does not begin from date of installation.
- This product must be installed by a licensed electrician. Warranty will be void if this requirement is not met.
- Retain proof of purchase and evidence of installation by a licensed electrician.
- Warranty will be void if there is any damage to product, due to improper usage or modification to fitting.
- Failure to follow the instructions in this manual may increase the risk of damage or injury and will void warranty.
- If luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.